

Eyewash Stations

- Supports quick emergency response in the event of chemical exposure

V9655 Emergency Shower & Eyewash Combination Unit key features:


- Material: Stainless steel 304
- Finish: Epoxy Coating – Yellow
- Operating Pressure: 250 to 400kpa
- Eyewash Flow Rate : $\geq 11.4\text{L}/\text{min}$
- Shower Flow Rate: $\geq 75.7\text{L}/\text{min}$
- Hand or foot operated for easy use

V9660 Portable Eyewash Station 60L key features:

- Material: PE (Polyethylene)
- Rated Capacity: 60L
- Functional Capacity: 58L
- Water Flow Rate: $\geq 1.5\text{ L}/\text{min}$ per nozzle
- Flushing Time / Duration: $\geq 15\text{ min}$
- Pull handle for quick activation
- Dual aerated spray nozzles for even, gentle water flow
- Wall-mountable, free standing
- Complies with ANSI Z358.1, AS 4775, EN 15154, and OSHA 29 requirements



V9655

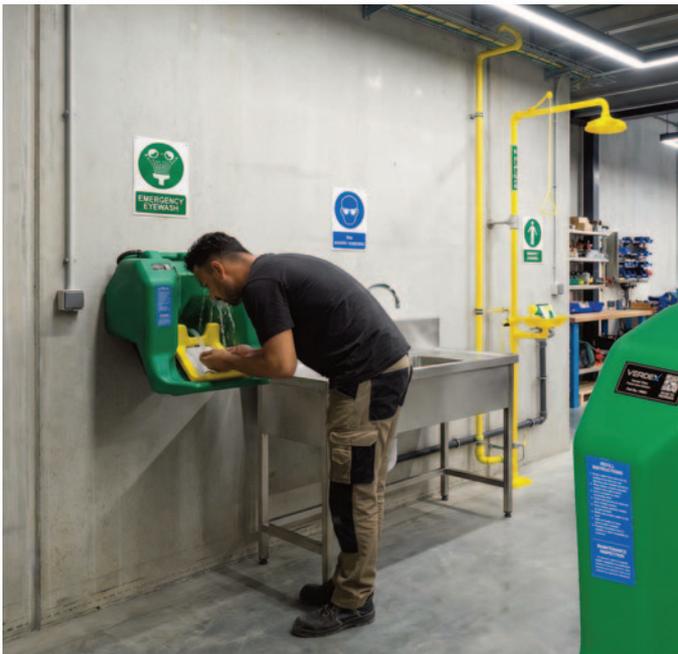

V9660

Code	Details	Unit Weight (kg)
V9660	Portable Eyewash Station (60L)	10
V9655	Emergency Shower & Eyewash Combination Unit	13.5